

**B-TIMER**

**SAFETY AT A GLANCE**

*New!*



**for P21 / P31 / P41**

**Filter cartridge change now safe, simple and economic!**

The mini computer counts the operating hours and measures accurately the cartridge saturation. Cartridge exchange due is clearly displayed.

For all mobile BAUER compressors; also for upgrading!

### IMPORTANT WHERE IT COUNTS!

- New!** **Filter monitoring** now for **all mobile compressors** with TRIPLEX-P 21, SUPER TRIPLEX-P 31 and P 41 filter systems without electronic compressor control - **also** for **upgrading**.
- New!** **Hour meter** integrated in B-TIMER!
- New!** **Most simple mounting** without piping or wiring - **only screw driver required!**
- New!** **Extremely robust** for global use even under toughest ambient conditions: dust- and splash proof, insensitive to salt, heavy insolation, high humidity and sand.


### Most simple maintenance

The **key symbol** indicates that a **maintenance** is due. The **letters** A to C inform about the **necessary** maintenance **kit**.

**A** = 500 h resp. 1 year; **B** = 1000 h resp. 2 years; **C** = 2000 h resp. 3 years)

### Data Safe!

The **battery reading** warns in time if battery change is required. The B-Timer **saves operating hours** and **maintenance intervals** on its RAM in case of battery exchange or longer storage without battery. During standstill of the compressor the B-Timer changes automatically to power save mode. The **long-life lithium cell** (3 V) lasts approx. 3 years (500 h/1/year).

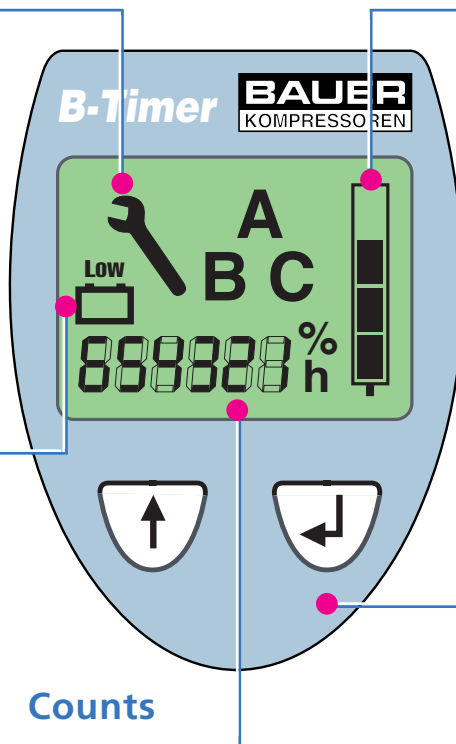

### Counts

### reliably the operating hours

Via a highly sensitive special sensor the hour meter **starts automatically** at compressor start and **stops** counting **automatically** again if compressor stops.

### Saturated?

On the four-part **segment display** the **status** of **saturation** of the cartridge can be followed up. If the remaining capacity is less than 20%, the last segment is flashing and instead of the operating hours the **order number** of the **cartridge** required is indicated. If the cartridge is saturated, all four segments are flashing.

### Easy set-up

For the initial operation the compressor data is entered via **two operating keys**. The menu does almost **without language**. Symbols make it **easy** to use.